

# Technical data sheet

## Cable ladder PS75, 3 m


Item number: 6903427



Heavy-duty PS75 cable ladder system, welded version. The side height is 75 mm with a supply length of 3,000 mm.

6,000 mm delivery length on request.

Magnetic shield insulation without cover 10 dB, with cover 15 dB.

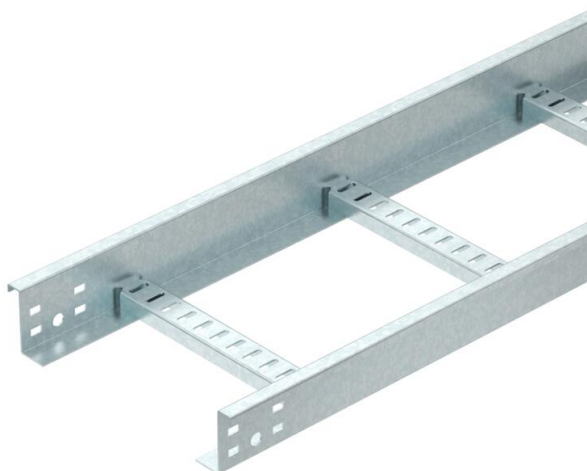


**St** Steel

**FT** Hot-dip galvanised

### Master data

Item number	6903427
Type	PS75 800 HDG
Description 1	Cable ladder
Description 2	heavy PS75
Manufacturer	O-line
Dimension	75x850x3000
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	3
Unit of quantity	Metre
Weight	798.34 kg
Weight unit	kg/100 m

### Dimensions

	Length	3,000 mm
	Length	3,000 ft
	Width	800 mm
	Height	75 mm
	Dimension B	800 mm
	Dimension L	75 mm

# Technical data sheet

Cable ladder PS75, 3 m

Item number: 6903427



## Technical data

Rung distance	300 mm
Rail thickness	2 mm

## Loads

Support spacing 2.0 m	3.9 kN/m
Support spacing 4.0 m	0.9 kN/m
Support spacing 6.0 m	0.3 kN/m