


Technical data sheet

Mesh cable tray, Gridspan GS75

Item number: 6901473



Mesh cable tray made of spot-welded steel wire of side height 75 mm.
Aperture size = 50 x 50 mm.

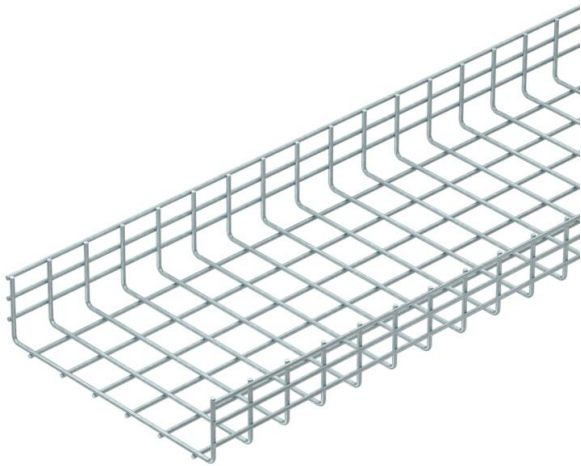

CE

- St** Steel
- FT** Hot-dip galvanised

Master data

| | |
|---------------------|--------------------|
| Item number | 6901473 |
| Type | GS75 500 HDG |
| Description 1 | Mesh cable tray |
| Description 2 | heavy |
| Manufacturer | O-line |
| Dimension | 85x520x3000 |
| Material | Steel |
| Surface | Hot-dip galvanised |
| Surface standard | DIN EN ISO 1461 |
| Smallest sales unit | 3 |
| Unit of quantity | Metre |
| Weight | 456 kg |
| Weight unit | kg/100 m |

Dimensions

| | |
|--------|----------|
| Length | 3,000 mm |
| Width | 500 mm |
| Height | 75 mm |

Technical data sheet

Mesh cable tray, Gridspan GS75

Item number: 6901473



Technical data

| | |
|---|--------------------|
| Mounting system fastening type | Floor Ceiling Wall |
| Type of connector, cable support system | Screwed |

Loads

| | |
|-----------------------|----------|
| Support spacing 1.5 m | 3 kN/m |
| Support spacing 2.0 m | 1.2 kN/m |
| Support spacing 3.0 m | 0.4 kN/m |