

# Technical data sheet

## Surge arrester, 3-pole with fuse monitoring 280 V

Item number: 5096251



Surge arrester, type 2, ready for connection with remote signalling and voltage monitoring


- Complete unit consisting of upper part and base, pre-mounted and ready for connection
- Suitable for TN network systems
- With voltage monitoring of phases and function monitoring of arrester upper parts
- With remote signalling and potential-free changeover contact
- Plug-in upper part; upper part can be separated from base without tools
- Incl. thermal and dynamic cut-off unit
- With visual display of defects
- High current conductivity and long service life
- \* Complete = cover and base



### Master data

Item number	5096251
Description 1	SurgeController V20
Description 2	with safety monitoring
Manufacturer	OBO
Dimension	280V
Smallest sales unit	1
Unit of quantity	Piece
Weight	45 kg
Weight unit	kg/100 pc.

### Dimensions

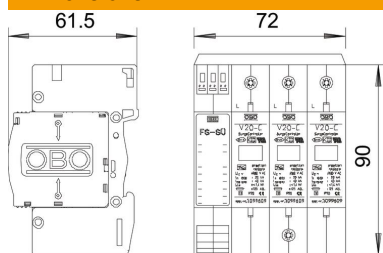

# Technical data sheet

## Surge arrester, 3-pole with fuse monitoring 280 V

Item number: 5096251



### Technical data

	Arrester surge current (8/20 µs) [total]	60 kA
	Response time	<25 ns
	Blow-out	no
	Version for	3-pole with FS-SÜ; 280 V
	Pole version	3
	Structural width in division units (division unit, 17.5 mm)	4
	Operating temperature, max.	80 °C
	Operating temperature, min.	-40 °C
	Remote signalling	no
	Maximum continuous voltage AC	280
	Integrated back-up fuse	no
	Conductor cross-section, flexible (fine-wire), min.	25 mm <sup>2</sup>
	Conductor cross-section, rigid (single-wire/multiwire), max.	35 mm <sup>2</sup>
	Conductor cross-section, rigid (single-wire/multiwire), min.	2.5 mm <sup>2</sup>
	Lightning protection zone LPZ	1→2
	Max. mains-side overcurrent protection	125
	Maximum back-up fuse	125 A
	Maximum discharge current (8/20 µs)	40 kA
	Installation type	DIN rail 35 mm
	Nominal discharge current (8/20 µs)	20 kA
	Nominal discharge current (8/20 µs) [L-N]	20 kA
	Nominal voltage AC (50/60 Hz)	230 V
	Network form	TN
	TN network form	yes
	TN-C network form	yes
	Test class, type 2	yes
	Protection rating	IP20
Protection level	≤1,3	
Signalling on device	Visual	
SPD to EN 61643-11	Type 2	
SPD to IEC 61643-1	Class II	